

HUSSMANN®

LBN-6

Ice Cream and Frozen Food Self-Contained Merchandiser




IR Ingersoll Rand

Ice Cream and Frozen Food Merchandiser

LBN Horizontal, Self-Contained or Remote Case

HUSSMANN®

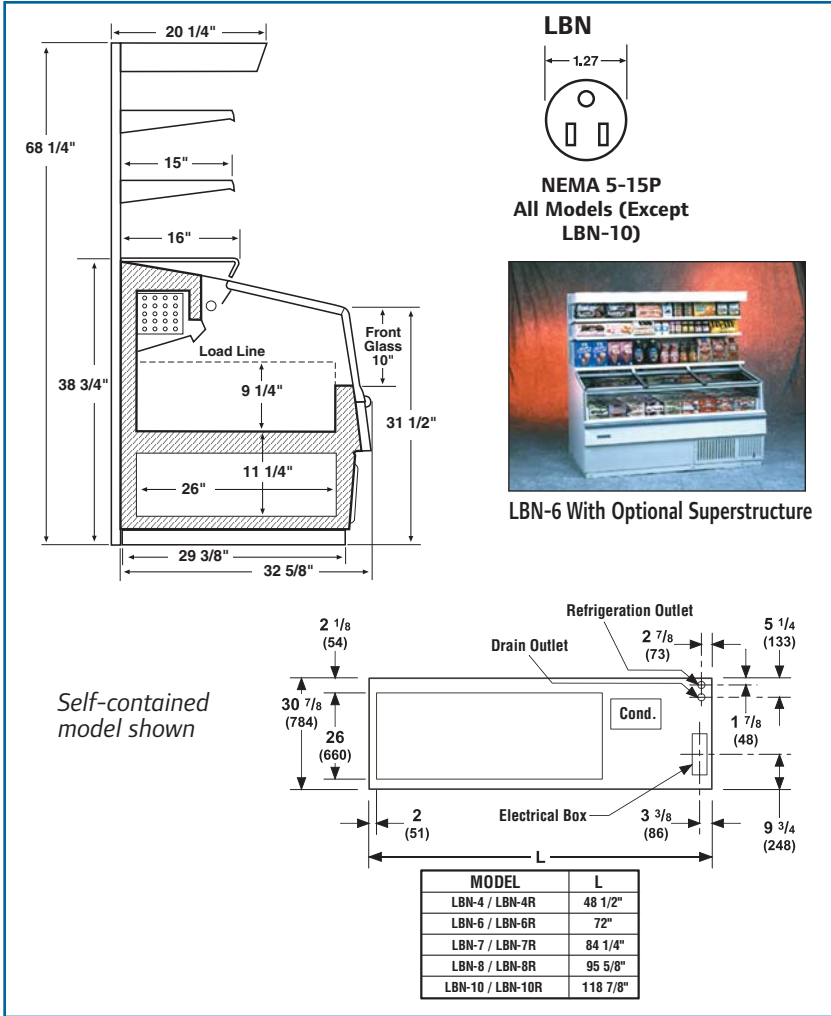

Design

Large 10" front window provides greater product viewing area. "Sweep back" design of lower merchandiser area enhances product visibility and provides customer "toe" space for easy access to product display. Enhanced design and visibility stimulates impulse product sales.

Construction

Built to last with minimum maintenance. Durable white powder coated paint exterior finish. Standard front bumper design protects merchandiser front. Tempered glass low-E fog-resistant lids. CFC-free blown in urethane insulation.

Serviceability

Slide-out refrigeration and electrical components accessible from front. Front air discharge for positioning merchandisers back-to-back or against wall**.

Warranty

For detailed warranty information, visit www.hussmann.com.

Optional Accessories

- Laminate Countertop
- Superstructure Available With Lighted or Unlit Canopy
- Display Compartment Shelves
- Choice of Exterior Colors
- Bag Rack
- Novelty Baskets
- Leg Kit
- Lid Lock
- Casters
- Remote Application

Model	Dimensions			Unit H.P.	Refrig	Electrical					Approx. Ship Wt. (Lbs.)
	Exterior					Hz/Ph	Volts	Run Amps	Fuse Amps	NEMA Plug	
LBN-4	48 1/2	32 5/8	38 3/4	1/2	R-404a	60/1	115	10.2	15	5-15P	515
LBN-4R	48 1/2	32 5/8	38 3/4	-	R-404a	60/1	115	10.2	15	hardwired*	455
LBN-6	72	32 5/8	38 3/4	1/2	R-404a	60/1	115	10.2	15	5-15P	663
LBN-6R	72	32 5/8	38 3/4	-	R-404a	60/1	115	11.5	15	hardwired*	478
LBN-7	84 1/4	32 5/8	38 3/4	3/4	R-404a	60/1	115	11.5	15***	5-15P	745
LBN-7R	84 1/4	32 5/8	38 3/4	-	R-404a	60/1	115	12.0	15	hardwired*	502
LBN-8	95 5/8	32 5/8	38 3/4	3/4	R-404a	60/1	115	12.0	15***	5-15P	815
LBN-8R	95 5/8	32 5/8	38 3/4	-	R-404a	60/1	115	12.0	15	hardwired*	601
LBN-10**	118 7/8	32 5/8	38 3/4	1	R-404a	60/1	115 208-230	2.7 7.7	15	6-15P	967
LBN-10R	118 7/8	32 5/8	38 3/4	-	R-404a	60/1	115 208-230	2.7 7.7	15	hardwired*	710

*Field hardwired **LBN-10 has rear air discharge ***15 Amp time delay breaker or fuse required

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% RH. Case is designed for pre-frozen product only.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.



Case Model	*Refrigeration Load (BTU/h)	A/C Load (BTU/h)	Energy Consumption (kWh/day)
LBN-4	2924	5993	13.58
LBN-4R	2924	-	-
LBN-6	3330	6827	15.38
LBN-6R	3330	-	-
LBN-7	4000	8200	18.52
LBN-7R	4000	-	-
LBN-8	4600	9430	20.20
LBN-8R	4600	-	-
LBN-10	5400	11068	22.70
LBN-10R	5400	-	-

*Refrigeration load calculated at -25° F evaporation temperature and 110° F condensing temperature

Web Site: www.hussmann.com

